


HL-CONT Plus

Sewage Treatment Plants

IMO certified MEPC.227 (64)


KEY FEATURES

- **Compact and lightweight**
The plant's small footprint allows the installation in tight spaces.
- **Dismountable for retrofitting**
Disassembled, the largest components fit through standard sized hatches and doors.
- **Low Maintenance Requirements**
Our open design gives easy access for inspection and service. There are no membranes or filters to clean, service or replace. The system includes few wearing parts.
- **Easy Operation**
Routine functions are completely automatic. System status is displayed on an easy-to-use digital touch screen.
- **Low operating costs**
The minimum number of wearing parts, only one operating supply (floculant) and low electrical consumption keep operating costs down.

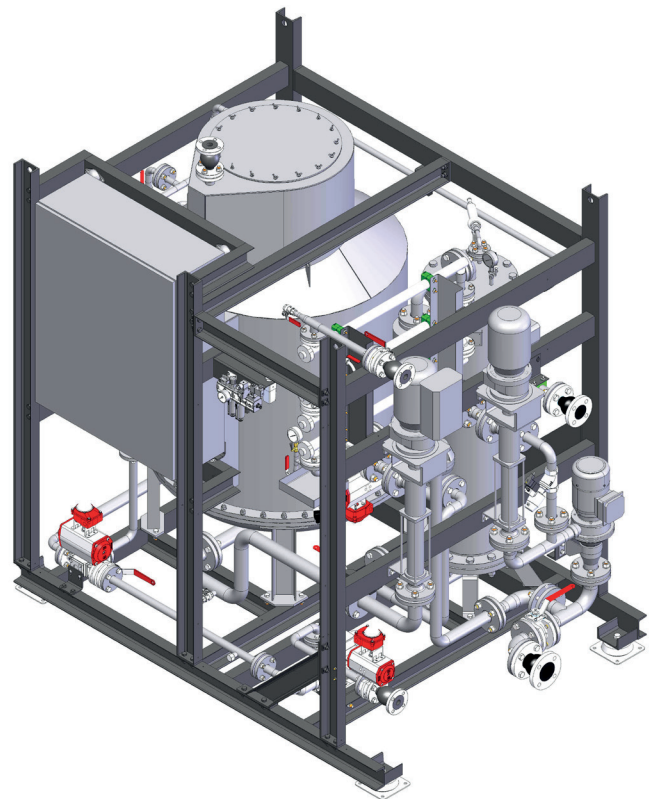

- **HAMANN Quality**
 - Over 45 years experience in sewage treatment
 - Proven track record; over 5.000 units sold to date
 - All parts and materials selected to meet the most demanding requirements
 - Designed and manufactured in Hollenstedt, Germany according to our accredited ISO9001 quality management system
 - Supported by a worldwide service network

TECHNOLOGY

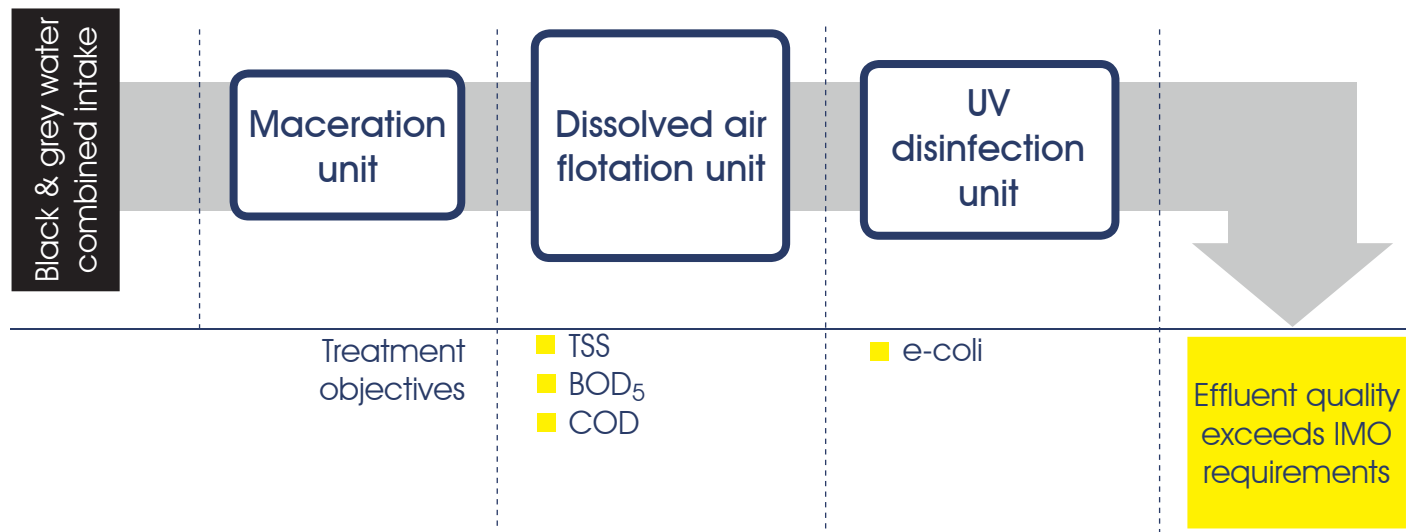

SPECIFICATIONS

Size	Capacity (liters/day)	People on board (135 l/day)	People on board (180 l/day)	Size W/L/H (m)	Empty weight (kg)	Electrical consumption (kW)	Vent connection (Inch)
0125	3.000	22	16	0,8/0,9/0,9	165	2,1	1/2
025	6.000	44	33	0,9/1,2/0,9	312	2,3	1
05	12.000	88	66	1,0/1,3/1,4	691	2,6	1
10	24.000	177	133	1,2/1,6/1,8	880	3,5	1
20	48.000	355	266	1,6/2,1/2,1	1.600	5,2	1
40	96.000	711	533	2,3/2,5/2,3	2.234	8,5	1
80	192.000	1.422	1.066	2,1/4,7/2,8	4.700	15,0	2

Supported by:

on the basis of a decision
by the German BundestagHAMANN  AG

Follow us!

[linkedin.com/company/hamannag](https://www.linkedin.com/company/hamannag)twitter.com/hamann_agBei der Lehmkuhle 4
21279 Hollenstedt
GermanyPhone: +49 (0) 4165 22 11 -0
E-Mail: sales@hamannag.comwww.hamannag.com